
SHEEP HOCK CUTTER Model 425-16



The Jarvis Model 425-16 - hydraulically powered hock cutter for sheep.

- The 425-16 is best suited for sheep hock cutting before fleece removal. It is also suitable for beef tail removal and hog hock cutting.
- Compact for easy maneuverability; robust for long, trouble-free operation.
- Super fast cutting cycle combined with high cutting force means high performance for the most demanding applications.
- Available with pistol grip or in straight handles for optimum operator comfort.
- Anti-tie down controls for operator safety.
- Constructed from corrosion resistant materials for optimum hygiene.
- Meets national and international requirements for hygiene and safety.



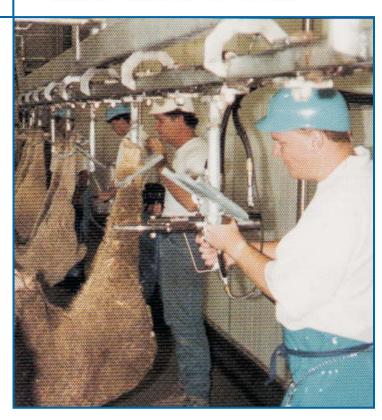

SHEEP HOCK CUTTER Model 425-16

Specifications		
Drive		Hydraulic
Model 425-16		
Capacity		720 / hour
Cutting Cycle Time		1.0 sec
Cutting Force Control Handle	1300 lbf	5.78 kN
Air / Dual Anti-tie Down	50 psi	3.4 bar
Blade Opening	3.7 in	94 mm
Overall Length		
With Pistol Grip Handle	18 in	460 mm
With In-Line Handle	25 in	635 mm
Weight	20 lbs	9 kg
Hydraulic Power Unit		Ŭ
Motor Power	5.0 hp	3700 W
Operating Voltage	•	30 V, 3 phase, 60 Hz
operating remage		ner voltages available
Hose Length	16 ft	5 m
Oil Capacity	20 gal	76 L
Overall Dimensions (with heat exchan	<u> </u>	702
(34 x 24 x 28 in	864 x 610 x 711 mm
Overall Dimensions (without heat exchanger) (I x w x h)		
(31.5 x 25.4 x 28 in	800 x 645 x 711 mm
Weight (without oil)	250 lbs	113 kg
Equipment Selection and Accessories		Order Number
Model 425 -16	with straight handles ith pistol grip and "D" handles	4025072 4025075
Hydraulic Power Unit (720 / hour)	460 / 230 V, 3 phase, 60 Hz*	4027266
Hydraulic Power Unit (1000 / hour) with control box and hoses,	460 / 230 V, 3 phase, 60 Hz*	4027307
Balancer		4042045
Blade		1023366

^{*} For other configurations: please specify voltage, hertz, and intended country of operation when ordering.



Products for the meat and poultry industry